

PRODUCT DATA SHEET

VITRUM SALAD BAR

SIZE 10GN

MODEL RSB 10GN

Designed, developed, and
manufactured in Latvia.







A high-capacity, high-quality salad bar/salad display, designed, developed, and manufactured in Latvia to meet market demands.

GENERAL FEATURES:

- ✓ Solid base frame constructed from an aluminum profile.
- ✓ AISI 304 stainless steel wet-polished plates
- ✓ Insulation material PUR 32MP, 30 mm thickness
- ✓ Refrigerant R290 (Propane), GWP = 3
- ✓ Air-cooled chiller with evaporators pressure-tested at 100 bar
- ✓ High-quality refrigeration and technical components
- ✓ Power: 1.68 kW, 230V, single-phase (1N)
- ✓ Digital temperature control with pre-programmed defrost cycles
- ✓ Digital weekly timer that turns the unit on and off at set times.
- ✓ LED light
- ✓ Compactly designed for transport through store roller shutters
- ✓ Silestone® top plate around the cooling well
- ✓ Includes an additional socket for external equipment **(NB! The total connected power must not exceed the available circuit capacity!)**
- ✓ Separate maintenance and service hatch
- ✓ Space for bowls, lids, and cutlery on the top plate.
- ✓ Storage space
- ✓ Delivered fully assembled on wheels with long supply cable and loose plug
- ✓ Explosion-prevention measures implemented following an assessment of the product's cooling system and construction


We strongly recommend an annual service and maintenance agreement for your salad bar to ensure optimal performance and longevity. This reduces the risk of unexpected downtime and operational problems with subsequent unnecessary additional costs and lost sales.

Model: RSB 10GN

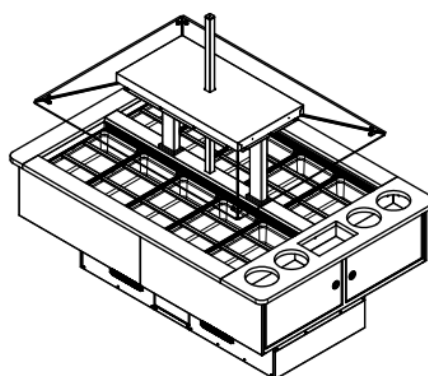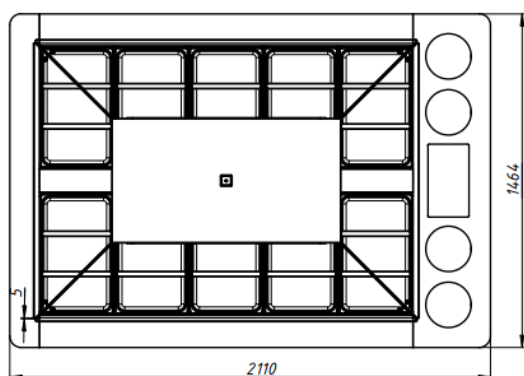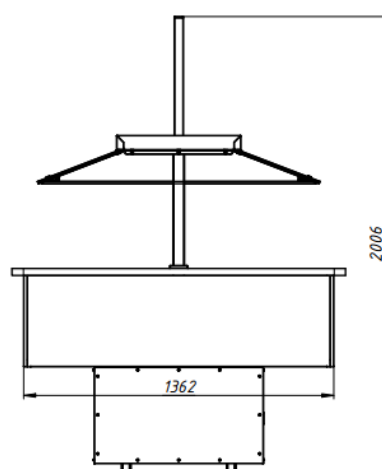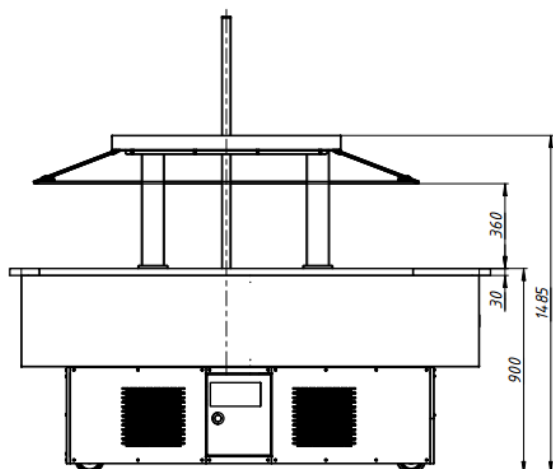

Dimensions:

Height: 900 /1485 mm
Width: 1464 mm
Length: 2110 mm

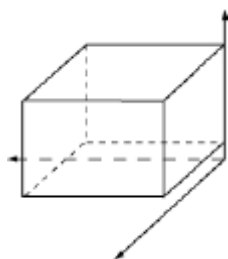

High-capacity and high-quality salad bar/salad display designed, developed, and manufactured in Latvia to meet the market's needs.

GENERAL FEATURES

- ✓ Solid base frame constructed from an aluminum profile
- ✓ AISI 304 stainless steel wet-polished plates
- ✓ Insulation material PUR 32MP, 30 mm thickness
- ✓ Refrigerant R290 (Propane), GWP = 3
- ✓ Air-cooled chiller with evaporators pressure-tested at 100 bar
- ✓ High-quality refrigeration and technical components
- ✓ Power: 1.68 kW, 230V, single-phase (1N)
- ✓ Digital temperature regulation with pre-programmed defrost cycles
- ✓ Digital weekly timer that turns the unit on and off at set times.
- ✓ LED lights
- ✓ Compactly designed for transport through store roller shutters
- ✓ Silestone® top plate around the cooling well
- ✓ Includes an additional socket for external equipment (**NB! The total connected power must not exceed the available circuit capacity!**)
- ✓ Separate maintenance and service hatch
- ✓ Space for bowls, lids, and cutlery on the top plate
- ✓ Storage space
- ✓ Delivered fully assembled on wheels with long supply cable and loose plug
- ✓ Explosion-prevention measures implemented following an assessment of the product's cooling system and construction

We strongly recommend an annual service and maintenance agreement for your salad bar to ensure optimal performance and longevity. This reduces the risk of unexpected downtime and operational problems with subsequent unnecessary additional costs and lost sales.

Dimensions: (Not provided in the original text)